



## Series 2603

Zetco AGA Approved  
Cast Iron  
Flanged Lockable  
Ball Valve

### FEATURES

MANUFACTURED IN ITALY
LOCKABLE HANDLE ALLOWS VALVE TO BE LOCKED IN OPEN OR CLOSED POSITION
DUCTILE IRON BODY AND FLANGE
FULL BORE
AUSTRALIAN GAS ASSOCIATION APPROVAL #6633
DOUBLE O-RINGS IN THE STEM GUARANTEE A DYNAMIC SEAL
BLOW-OUT PROOF STEM
CARBON-REINFORCED PTFE BALL SEALS GUARANTEE CONSISTENT TORQUE
FOR BURIED INSTALLATIONS, VALVE MUST BE COMPLETELY WRAPPED IN DENSO® TAPE
FLANGES ARE DRILLED TO CLIENT SPECIFICATIONS
MUST BE OPERATED IN FULLY OPEN OR CLOSED POSITION
ALL VALVES PRESSURE TESTED DURING PRODUCTION
SIZE RANGE: 50MM TO 150MM

### PRESSURE AND TEMPERATURE RATINGS

TEMPERATURE RANGE: -10°C TO 70°C
MAXIMUM OPERATING PRESSURE AT NOMINAL TEMPERATURES: 1600 kPa




AGA 6633 G  
AS 4617

# Series 2603

Zetco AGA Approved Cast Iron  
Flanged Lockable Ball Valve



## DIMENSIONAL AND COMPONENT DIAGRAM

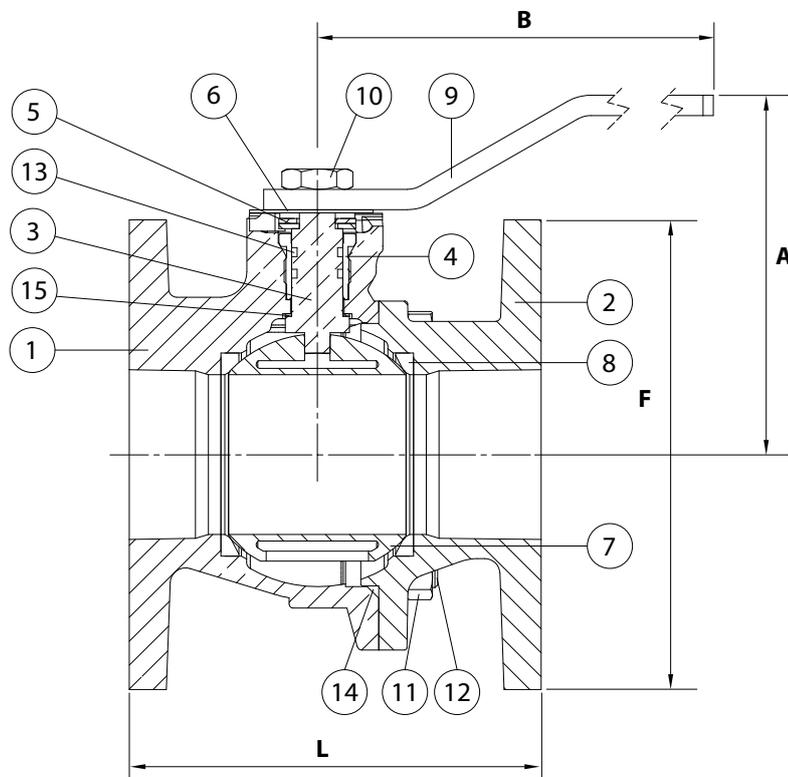

### MATERIALS

POS.	PART NAME	MATERIALS
1	BODY	DUCTILE IRON
2	FLANGE	DUCTILE IRON
3	STEM	BRASS
4	GLAND NUT	BRASS
5	STOPPER PLATE	STAINLESS STEEL 304
6	LOCKING PLATE	STAINLESS STEEL 304
7	BALL	BRASS (CHROME PLATED)
8	SEAL	PTFE + CARBON
9	HANDLE	POWDER COATED STEEL
10	NUT	STAINLESS STEEL 304
11	NUT	STAINLESS STEEL 304
12	BOLT	STAINLESS STEEL 304
13	O-RING	NBR
14	O-RING	NBR
15	THRUST WASHER	PTFE

### DIMENSIONS - mm

Prod. Code	Size	A	B	L	F	Wgt kg
2603050	50	135	230	140	165	9.00
2603065	65	143	230	161	185	10.50
2603080	80	165	280	171	200	15.50
2603100	100	180	360	181	220	18.50
2603125	125	225	450	191	250	28.00
2603150	150	243	560	200	285	38.50